




Thk Environmental Axis.

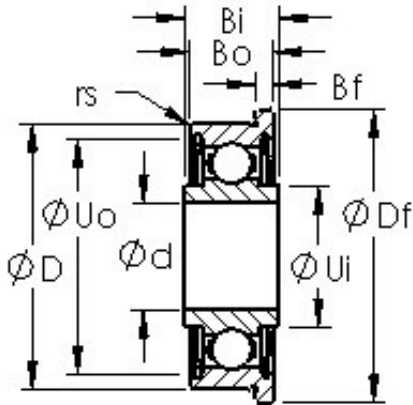

AST SFRW2-6ZZ Cojinetes de bolas profundas

Bearing No. SFRW2-6ZZ

Bore Diameter	3,175 mm
Outer Diameter	9,525 mm
Bearing Type	Flanged Shielded with Extended Inner
Bore Dia (d)	0.1250
Outer Dia (D)	0.3750
Outer Width (Bo)	0.1406
Inner Width (Bi)	0.1718
Radius (min) (rs)	0.006
Flange Dia (Df)	0.4220
Flange Width (Bf)	0.031
Dynamic Load Rating (Cr)	122
Static Load Rating (Cor)	41
Max Speed (Grease) (X1000 RPM)	53
Max Speed (Oil) (X1000 RPM)	63
Max. Shaft Shoulder Dia. Inner (Ui)	0.2
Min. Housing Shoulder Dia., Outer (Uo)	0.323
Ball Qty	7
Ball Dia (Dw)	0.0625
Weight (g)	1.35
Precision	A1
Standard Clearance	K25
Material	Martensitic Stainless Steel

SFRW2-6ZZ Bearing 2D drawings and 3D CAD models