




Thk Environmental Axis.

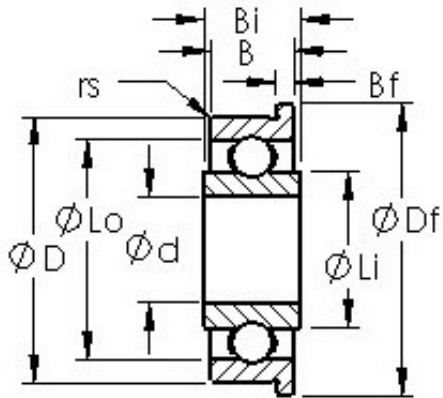

AST SFRWO Cojinetes de bolas profundas

Bearing No. SFRWO

Bore Diameter	1,19126 mm
Outer Diameter	3,96748 mm
Bearing Type	Flanged Open with Extended Inner
Bore Dia (d)	0.0469
Outer Dia (D)	0.1562
Outer Width (Bo)	0.0625
Inner Width (Bi)	0.0937
Radius (min) (rs)	0.004
Flange Dia (Df)	0.2030
Flange Width (Bf)	0.013
Dynamic Load Rating (Cr)	21
Static Load Rating (Cor)	6
Max Speed (Grease) (X1000 RPM)	110
Max Speed (Oil) (X1000 RPM)	130
Max. Shaft Shoulder Dia. Inner (Li)	0.1
Min. Housing Shoulder Dia., Outer (Lo)	0.1
Ball Qty	7
Ball Dia (Dw)	0.0236
Weight (g)	0.12
Precision	A1
Standard Clearance	K25
Material	Martensitic Stainless Steel

SFRWO Bearing 2D drawings and 3D CAD models